



IES6300SL Series

DIN-Rail or Wall Mounting

6/12/20-Port Gigabit Layer 2 Managed Industrial Ethernet Switch (Optional PoE)

- Support 2 Gigabit SFP slots and 4 Gigabit copper ports (optional PoE), 4 Gigabit SFP slots and 8 Gigabit copper ports (optional PoE) or 4 Gigabit SFP slots and 16 Gigabit copper ports (optional PoE)
- Adopt Ring patented technology, support single ring, coupling ring, chain, Dual-homing function
- Support multiple network protocols and industry standards, such as STP/RSTP/MSTP, ERPS, PoE, DHCP, VLAN, QoS, IGMP Snooping, LLDP, ACL and SNMP.
- In PoE products, the maximum power consumption of 6 ports is 120W, and that of 12/16 ports is 240W
- Support dual power redundancy. The input voltage of non-PoE products: 12~60VDC, and that of PoE products: 44~57VDC
- Support -40~75°C wide operating temperature range



Industrial Grade



RPS

Introduction

IES6300SL series products are 6/12/20-port Gigabit layer 2 managed industrial-grade Ethernet switches with optional PoE. PoE power supply conforms to IEEE802.3af/at protocol standard. This series provides 6 products and supports Gigabit SFP slots, Gigabit copper ports, and Gigabit PoE copper ports. They adopt DIN-Rail or wall mounting to meet the requirements of different application scenes.

Network management system supports a variety of network protocols and industry standards, such as IPv4, VLAN, STP/RSTP/MSTP, ERPS, PoE, DHCP, LLDP, IGMP Snooping, QoS, Modbus TCP monitoring, port trunking, port mirroring, etc. It has perfect management functions, supporting port configuration, port statistics, ACL, 802.1X authentication, network diagnosis, rapid configuration, online upgrade, etc. CLI, WEB, Telnet, SNMP, SSH, and other access methods can be supported. Network management system could bring you great user experience through its friendly interface design and easy and convenient operation.

The input power supply is two independent power supply circuits which can ensure the normal operation of the device when one power supply fails. The design of DIP switch could implement device factory setting recovery and restart. When power supply or port has link failure, ALM indicator will be bright and send out alarm, meanwhile, alarm device connected to the relay will send out alarm for rapid scene troubleshooting. Hardware adopts fanless, low power consumption, wide temperature and voltage design and has passed rigorous industrial standard tests, which can suit for the industrial scene environment with harsh requirements for EMC. It can be widely used in smart city, safety city, intelligent manufacturing and other industrial fields.

Features and Benefits


- ⦿ SNMPv1/v2c/v3 is used for network management of various levels
- ⦿ RMON can be used for efficient and flexible network monitoring
- ⦿ Port mirroring can conduct data analysis and monitoring, which is convenient for online debugging
- ⦿ QoS supports real-time traffic classification and priority setting
- ⦿ LLDP can achieve automatic topology discovery, which is convenient for visual management
- ⦿ DHCP server, DHCP client, DHCP Option 82 could be used for allocating IP address of different strategies
- ⦿ DHCP Snooping can ensure DHCP client gets IP address from legal DHCP server
- ⦿ User privilege classification configuration can set user privilege level
- ⦿ SSH configuration and HTTPS configuration can improve device's management security and guarantee data access security
- ⦿ VLAN is used for simplifying network planning

- PoE could power device over Ethernet, thus decreasing the cable connection of powered devices
- File management is convenient for the device rapid configuration and online upgrading
- Log management records Console log, RAM log and Flash log
- Bandwidth management can reasonably distribute network bandwidth, preventing unpredictable network status
- Support port security (allow only MAC address assigned to system)
- Port statistics can be used for the port real time traffic statistics
- User password can conduct user hierarchical management to improve the device management security
- ACL can enhance network flexibility and security
- Relay alarm is convenient for troubleshooting of construction site
- Storm suppression can restrain broadcast, unknown multicast and unicast
- Port Trunking can increase network bandwidth and enhance the reliability of network connection to achieve optimum bandwidth utilization
- IGMP Snooping and static multicast can be used to filter multicast data to save network bandwidth
- STP/ RSTP/ MSTP could implement network redundancy and prevent network storm
- With high reliability and stability, ERPS could avoid broadcast storm caused by data loopback
- Support Modbus TCP protocol which can monitor device information in real time.
- Network diagnosis and troubleshooting could be conducted via Ping, Traceroute, Cable Diagnosis, SFP Digital Diagnosis


Dimension

Unit: mm


● IES6300SL-4GT2GS-2LV

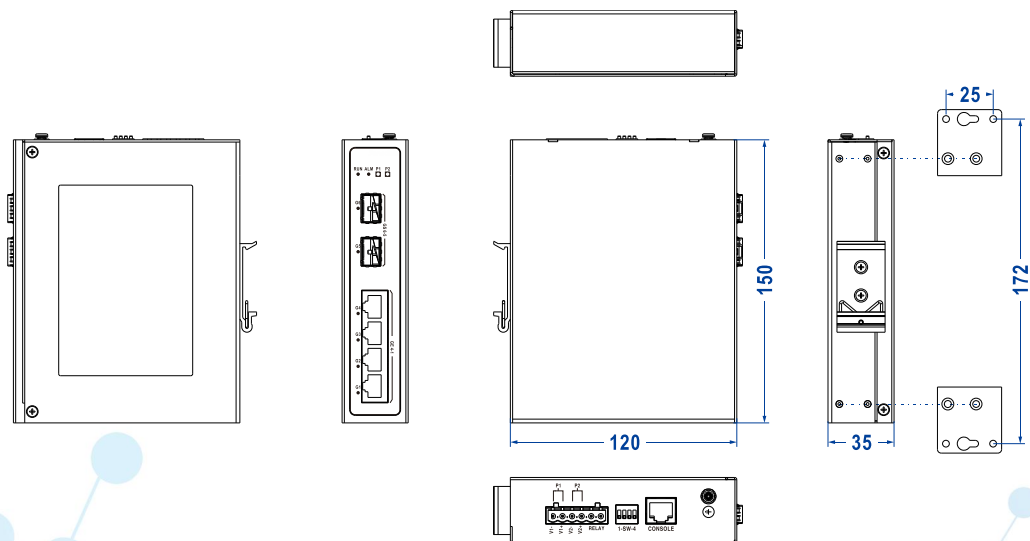


● IES6300SL-8GT4GS-2LV

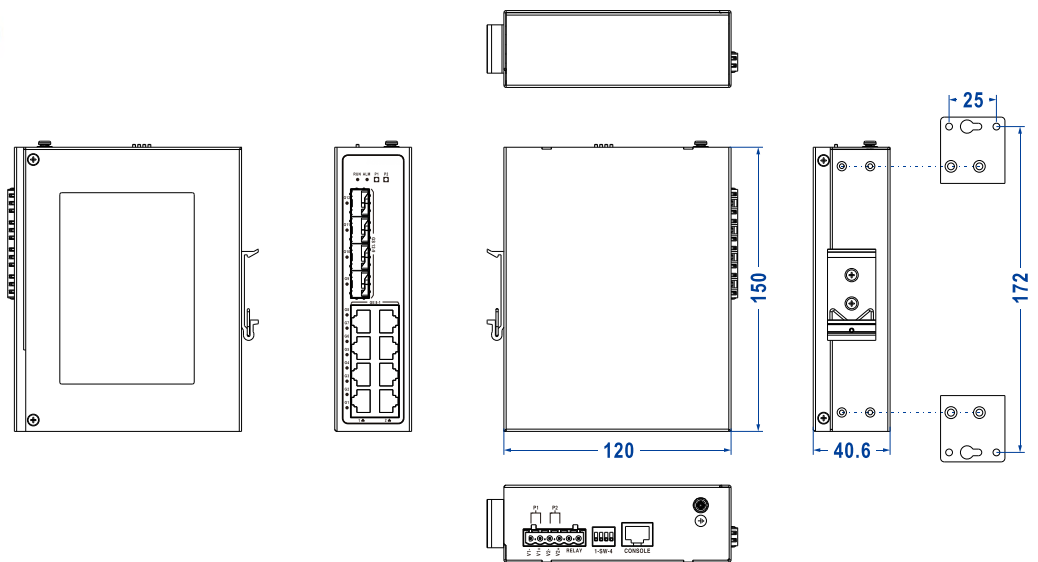


● IES6300SL-4GP2GS-2LV

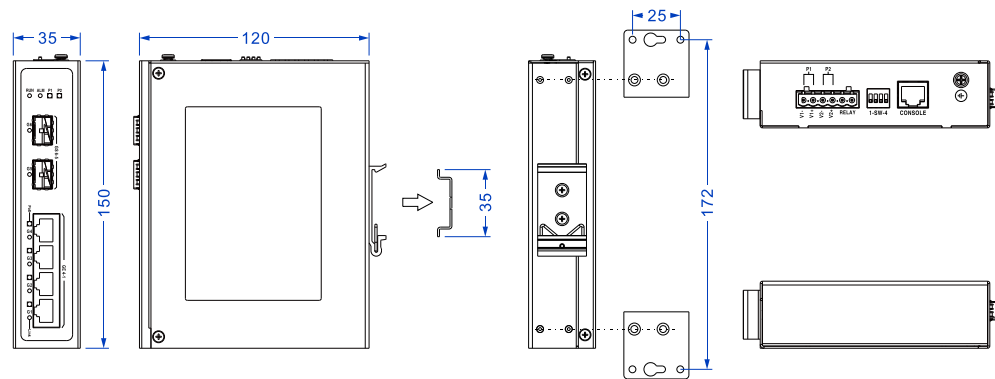


● IES6300SL-8GP4GS-2LV

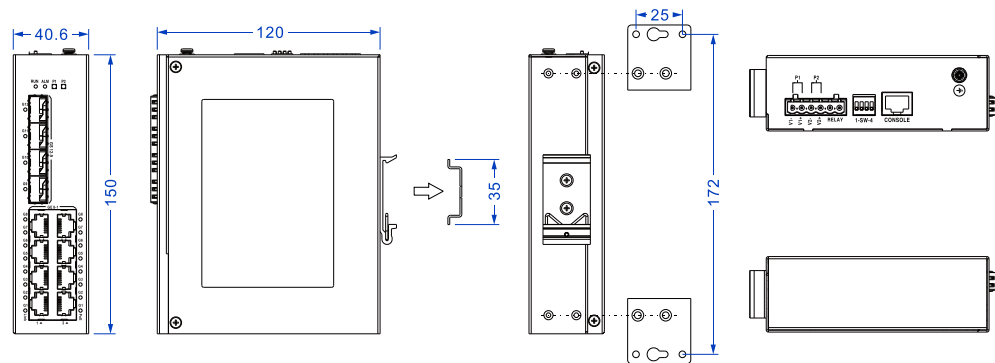

● IES6300SL-16GT4GS-2LV

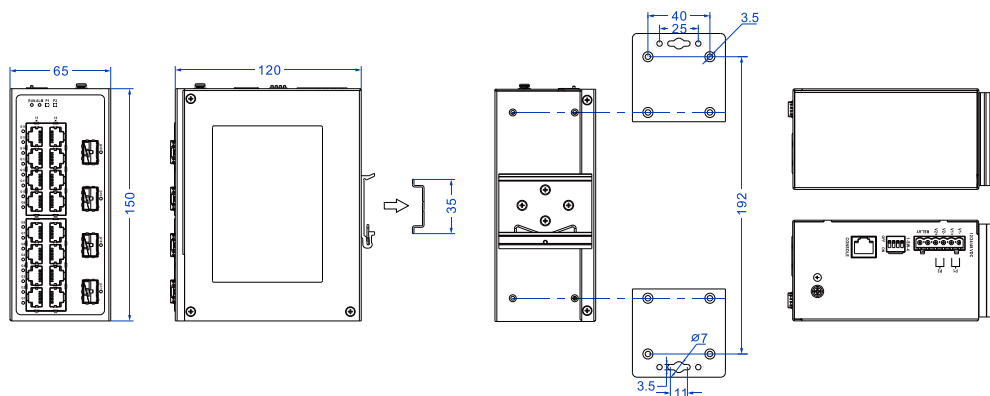

● IES6300SL-16GP4GS-2LV

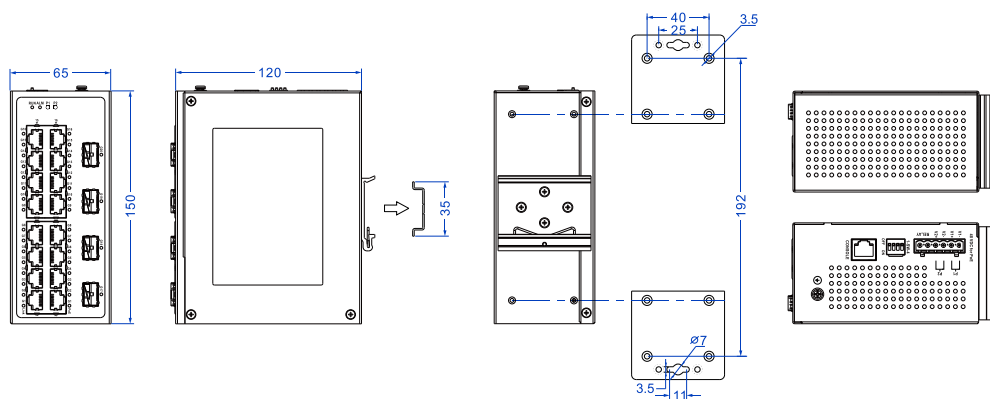

Specification

Standard & Protocol

IEEE 802.3 for 10Base-T Ethernet
 IEEE 802.3u for 100Base-TX
 IEEE 802.3z for 1000Base-X Fiber
 IEEE 802.3ab for 1000Base-T
 IEEE 802.3x for Flow Control and Back Pressure
 IEEE 802.1D for Spanning Tree Protocol
 IEEE 802.1w for Rapid Spanning Tree Protocol
 IEEE 802.1s for Multiple Spanning Tree Protocol
 IEEE 802.1Q for VLAN Tag
 IEEE802.1p for Class of Service (CoS)
 IEEE 802.1X for User Authentication (Radius)
 IEEE 802.1AB for Link Layer Discovery Protocol (LLDP)
 ITU-T G.8032 for ERPS
 IEEE 802.3ad for Link Aggregation Control Protocol (LACP)
 IEEE 802.3af for PoE
 IEEE 802.3at for PoE+

Management

SNMP v1/v2c/v3, RMON, LLDP, PoE, QoS, DHCP Server, DHCP Snooping, port settings, dynamic/static MAC addresses, MAC/IPv4, storm

suppression, user passwords, file management, log management, port statistics, link flapping protection, Modbus TCP monitoring

Security	User Privilege Classification, Port and Power Alarm, SSH Configuration, HTTPS Configuration, Access Control, SNMP, RMON, Port Limit Control, Port Security, NAS, ACL, Ethernet Services, RADIUS Server Authentication, TACACS + Server Authentication, Port Alarm, DC Power Supply Alarm, Email Alarm
----------	---

Switch Function	802.1Q VLAN, link aggregation, static aggregation, LACP, bandwidth flow control
-----------------	---

Unicast / Multicast	Multicast filtering, IGMP Snooping IGMPV1/V2/V3
---------------------	---

Redundancy Technology	Ring, STP/RSTP/MSTP, ERPS
-----------------------	---------------------------

Troubleshooting	Log record, port mirroring, Ping, Traceroute, network cable diagnosis, SFP DDM
-----------------	--

Time Management	NTP, Time Zone Configuration
-----------------	------------------------------

PoE (optional)	The maximum power of PoE port: 30W The power supply pin of PoE: V+, V+, V-, V- correspond to Pin 1, 2, 3, 6
----------------	--

Interface	Gigabit Copper Port: 10/100/1000Base-T(X), RJ45, Automatic Flow Control, Full/Half Duplex Mode, MDI/MDI-X Autotuning, optional PoE Gigabit SFP: 1000Base-X SFP slot Console port: CLI management port (RS-232), RJ45 Alarm port: support 1 relay alarm output, and adopt 6-pin 5.08mm pitch terminal blocks (relay occupies 2 pins)
-----------	--

LED Indicator	Running Indicator, Alarm Indicator, Power Supply Indicator, Interface Indicator, PoE Indicator
---------------	--

Switch property	IES6300SL-4GT2GS-2LV, IES6300SL-4GP2GS-2LV ● Transmission mode: store and forward ● MAC address: 8K ● Cache: 4.1Mbit ● Backplane bandwidth: 20Gbps ● Switch time delay: <10μs IES6300SL-8GT4GS-2LV, IES6300SL-8GP4GS-2LV,
-----------------	--

IES6300SL-16GT4GS-2LV, IES6300SL-16GP4GS-2LV

- Transmission mode: store and forward
- MAC address: 8K
- Cache: 4.1Mbit
- Backplane bandwidth: 56Gbps
- Switch time delay: <10μs

Power Supply

IES6300SL-4GT2GS-2LV, IES6300SL-8GT4GS-2LV,
IES6300SL-16GT4GS-2LV

- Power supply input: 12~60VDC, dual power supply redundancy
- Connection method: adopt 6-pin 5.08mm pitch terminal blocks (includes 4-pin power supply)
- Connection protection: support anti-reverse connection

IES6300SL-4GP2GS-2LV, IES6300SL-8GP4GS-2LV,
IES6300SL-16GP4GS-2LV

- Power supply input: 44~57VDC, dual power supply redundancy
- Connection method: adopt 6-pin 5.08mm pitch terminal blocks (includes 4-pin power supply)
- Connection protection: support anti-reverse connection

Power Consumption

IES6300SL-4GT2GS-2LV

- No-load: 3.6W@48VDC
- Full-load: 5.7W@48VDC (high temperature)

IES6300SL-8GT4GS-2LV

- No-load: 5.7W@48VDC
- Full-load: 10.1W@48VDC (high temperature)

IES6300SL-4GP2GS-2LV

- No-load: 3.3W@48VDC
- Full-load: 113.3W@48VDC

IES6300SL-8GP4GS-2LV

- No-load: 4.6W@48VDC
- Full-load: 229.3W@48VDC

IES6300SL-16GP4GS-2LV

- No-load: 7.5W@48VDC
- Full-load(without PoE): 16.1W@48VDC
- Full-load(PoE): 248.1W@48VDC

Working Environment

Operating temperature: -40~75℃

Storage temperature:-40~85℃

Relative humidity: 5%~95% (no condensation)

Mechanical Structure

IES6300SL-4GT2GS-2LV

- Housing: IP40 protection, metal
- Installation: DIN-Rail or wall mounting
- Dimension (W x H x D): 35mm×150mm×120mm
- Weight: 0.631kg

IES6300SL-8GT4GS-2LV

- Housing: IP40 protection, metal
- Installation: DIN-Rail or wall mounting
- Dimension (W x H x D): 40.6mm×150mm×120mm
- Weight: 0.678kg

IES6300SL-4GP2GS-2LV

- Housing: IP40 protection, metal
- Installation: DIN-Rail or wall mounting
- Dimension (W x H x D): 35mm×150mm×120mm
- Weight: 0.647kg

IES6300SL-8GP4GS-2LV

- Housing: IP40 protection, metal
- Installation: DIN-Rail or wall mounting
- Dimension (W x H x D): 40.6mm×150mm×120mm
- Weight: 0.694kg

IES6300SL-16GT4GS-2LV

- Housing: IP40 protection, metal
- Installation: DIN-Rail or wall mounting
- Dimension (W x H x D): 65mm×150mm×120mm

IES6300SL-16GP4GS-2LV

- Housing: IP30 protection, metal
- Installation: DIN-Rail or wall mounting
- Dimension (W x H x D): 65mm×150mm×120mm
- Weight: 1.088kg

Industrial Standard


EMI: FCC Part15 CISPR (EN55032) Class A
FCC Part15 CISPR22 (EN55022) Class A

IEC/EN 61000-4-2 (ESD, electrostatic discharge), Level 3

- Air discharge: ±8kV
- Contact discharge: ±6kV

IEC/EN 61000-4-3 (RF Field Strength Susceptibility)

- 80 MHz to 1 GHz: 10 V/m

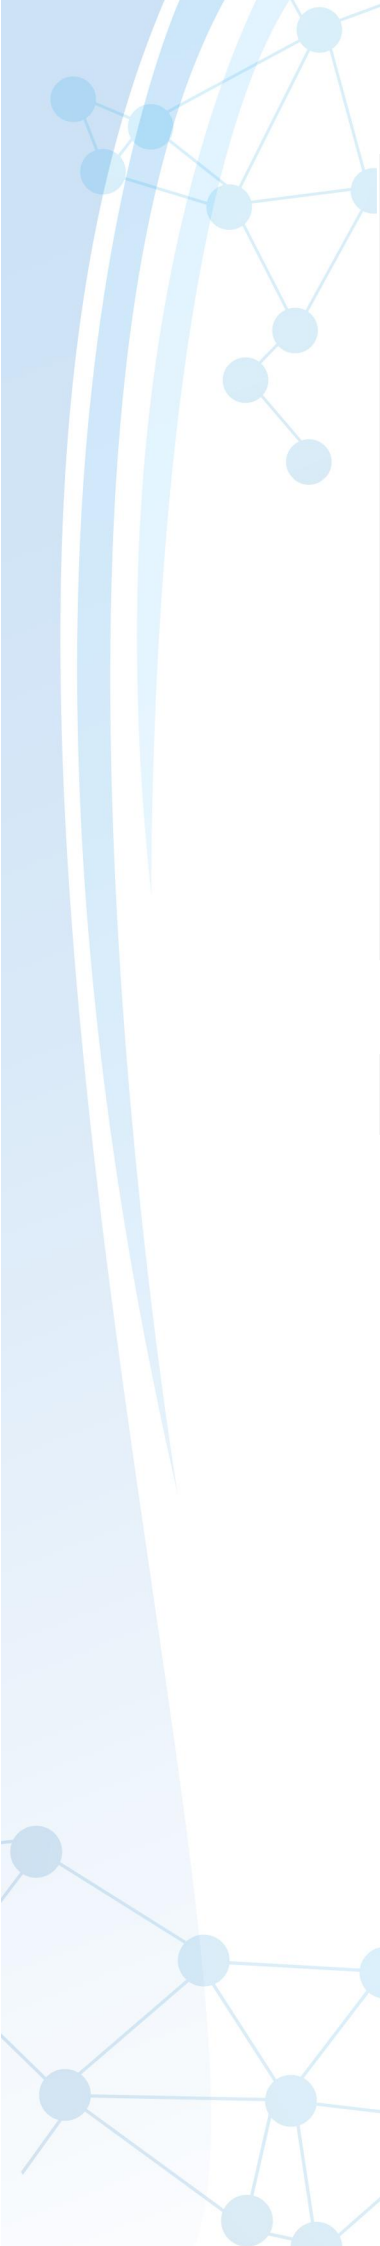

	IEC/EN 61000-4-4 (EFT, electrical fast transient pulses), Level 3 ● Power supply: $\pm 2\text{kV}$ ● Ethernet port: $\pm 1\text{kV}$ ● Relay: $\pm 2\text{kV}$ IEC/EN 61000-4-5 (Surge), Level 4+ ● Power supply: common mode $\pm 6\text{kV}$, differential mode $\pm 2\text{kV}$ ● Ethernet port: common mode $\pm 6\text{kV}$, differential mode $\pm 2\text{kV}$ ● Relay: common mode $\pm 2\text{kV}$, differential mode $\pm 1\text{kV}$ IEC/EN 61000-4-6 (Conducted Susceptibility): 10KHz IEC/EN 61000-4-8 Power Frequency Magnetic Field Susceptibility Shock: IEC 60068-2-27 Free fall: IEC 60068-2-31/ IEC 60068-2-32 Vibration: IEC 60068-2-64/ IEC 60068-2-6
Authentication	CE, UL, FCC, RoHS
Warranty	5 years

Ordering Information

Model	Gigabit Copper Port	Gigabit PoE Copper Port	Gigabit SFP Slot	PoE Power	Power Supply
IES6300SL-4GT2GS-2LV	4	—	2	—	12~60VDC Dual power supply redundancy
IES6300SL-8GT4GS-2LV	8	—	4	—	12~60VDC Dual power supply redundancy
IES6300SL-4GP2GS-2LV	—	4	2	120W	44~57VDC Dual power supply redundancy
IES6300SL-8GP4GS-2LV	—	8	4	240W	44~57VDC Dual power supply redundancy
IES6300SL-16GT4GS-2LV	16	—	4	—	12~60VDC Dual power supply redundancy
IES6300SL-16GP4GS-2LV	—	16	4	240W	44~57VDC Dual power supply redundancy



Address: 3/B, Zone 1, Baiwangxin High Technology Industrial Park, Song Bai Road, Nanshan District, Shenzhen, 518108, China

TEL.: +86-755-26702668 ext 835 FAX: +86-755-26703485

E-mail: ics@3onedata.com

Website: www.3onedata.com

◀ Please scan our QR code for more details

*Product pictures and technical data in this datasheet are only for reference. Updates are subject to change without prior notice. The final interpretation right is reserved by 3onedata.