



## MES5400 Series

19-inch 1U Rack Mounting

30-port Gigabit Layer 3 Managed Industrial Ethernet Switch

- Support 4 Gigabit daughter board slots, 1 of which supports 6-SFP slot daughter board, and the other 3 support 8-SFP slot daughter board or 8-copper port daughter board.
- Support IEC 62439-3 HSR/PRP high reliability seamless redundancy and parallel redundancy, and all ports support IEEE 1588v2 PTP
- Support MRP ring network, reconfiguration time < 200ms
- Support Modbus TCP monitoring instruction of power SCADA system
- Support IEC61850 MMS modeling and management, ensuring the efficient, reliable and standardized communication between substation devices
- DC products support 2 hot-swappable 48VDC power inputs
- AC products support 2 x 220VAC (110~240VAC) power inputs
- Support -40~75°C wide temperature operation, support level 4 electromagnetic compatibility protection, and conform to IEC 61850-3 and IEEE 1613 (substation) standards
- Support IP30 protection grade



IEC 61850



Industrial Grade



RPS

# Introduction

MES5400 series are 30-port Gigabit layer 3 managed industrial Ethernet switches. Provide Gigabit copper port, Gigabit SFP slot, which can negotiate the port rate and duplex mode with the device at the opposite end through self-negotiation. Support power supply solutions of 48VDC or 110~240VAC, and adopt standard rack installation method, which is specially designed for extremely severe electromagnetic interference environment to meet the anti-interference requirements of power monitoring industry.

Network management system supports various network protocols and industrial standards, such as Static Routing, RIP, VRRP, NAT, STP/RSTP/MSTP, PTP, HSR/PRP, GMRP, EPRS, 802.1Q VLAN, QoS, Modbus TCP function, DHCP Server, DHCP Client, IGMP Static Multicast, LLDP, Port Trunking, Port Mirroring, etc. It also possesses complete management functions, including Port Configuration, Port Statistics, Port IP Binding, Access Control, 802.1X Authentication, Network Diagnosis, Rapid Configuration, Online Upgrading and so on; and supports CLI, HTTP, HTTPS, Telnet, SSH and other access methods. Network management system could bring you great user experience through its friendly interface design and easy and convenient operation.

The input power supply is two independent power supply circuits which can ensure the normal operation of the device when one power supply fails. When power supply or port has link failure, ALM indicator will be bright and send out alarm, meanwhile, alarm device connected to the relay will send out alarm for rapid scene troubleshooting. The hardware adopts fanless, low power consumption and wide temperature and voltage design, which has passed rigorous industrial standard tests, and suits the industrial scene environment with harsh requirements for EMC. It can be widely used in smart substation, smart grid, energy storage, photovoltaic, wind electricity, non-electric industry SCADA system and other industrial fields.

## Features and Benefits

- ⦿ PRP/HSR can realize zero packet loss fault recovery of substation and process automation system
- ⦿ IEC61850 MMS modeling and management ensures efficient, reliable and standardized communication between substation devices
- ⦿ Precision Time Protocol (PTP), provide sub-microsecond synchronization accuracy to meet requirements for high-precision time synchronization
- ⦿ SNMPv1/v2c/v3 is used for network management of various levels
- ⦿ RMON can be used for efficient and flexible network monitoring
- ⦿ QoS supports real-time traffic classification and priority setting
- ⦿ LLDP can achieve automatic topology discovery, which is convenient for visual management
- ⦿ DHCP server and DHCP client could be used for allocating IP address of different




strategies

- ⊙ DHCP Snooping can ensure DHCP client gets IP address from legal DHCP server
- ⊙ DHCP relay function can realize IP address, gateway, DNS configuration cross network segment
- ⊙ File management is convenient for the device rapid configuration and online upgrading
- ⊙ Log information and log server can record user operation, system failure, system security and other information locally and remotely
- ⊙ User privilege classification configuration can set user privilege level
- ⊙ ACL can enhance the flexibility and security of the network, supporting bidirectional ACL IN and OUT.
- ⊙ SSH configuration and HTTPS configuration can improve device's management security and guarantee data access security
- ⊙ Ring, MRP, STP/RSTP/MSTP can achieve network redundancy, preventing network storm
- ⊙ EPRS function can realize link backup and improve the reliability of network
- ⊙ Relay alarm is convenient for troubleshooting of construction site
- ⊙ Storm suppression can restrain broadcast, unknown multicast and unicast
- ⊙ VLAN is used for simplifying network planning
- ⊙ Port Trunking and LACP can increase network bandwidth and enhance the reliability of network connection to achieve optimum bandwidth utilization
- ⊙ IGMP/MLD Snooping can be used for filtering multicast traffic to save the network bandwidth
- ⊙ IGMP/MLD can be used to manage and maintain multicast members
- ⊙ ARP could be used for MAC address resolution
- ⊙ VRRP, RIP/RIPng, ISIS, OSPF/OSPFv3 and BGP can realize dynamic routing configuration
- ⊙ PIM-DM and PIM-SM can be used to create and maintain multicast routing table entries and realize multicast routing forwarding
- ⊙ NAT maps private IP address to the legal IP address of external network, which can slow the consumption of IP address space
- ⊙ Loop detection could efficiently eliminate the influence caused by port loopback by detecting the existence of loopback
- ⊙ IPDT can track IP device status and realize interaction with other applications
- ⊙ Smart Link link backup, providing reliable and efficient backup and fast switching mechanism
- ⊙ Network diagnosis and troubleshooting could be conducted via Ping, Traceroute, cable diagnosis, SFP DDMI
- ⊙ Port mirroring can conduct data analysis and monitoring, which is convenient for online debugging
- ⊙ Supports Modbus TCP monitoring, convenient for various integrated systems to monitor and manage device status


## Dimension




Unit: mm

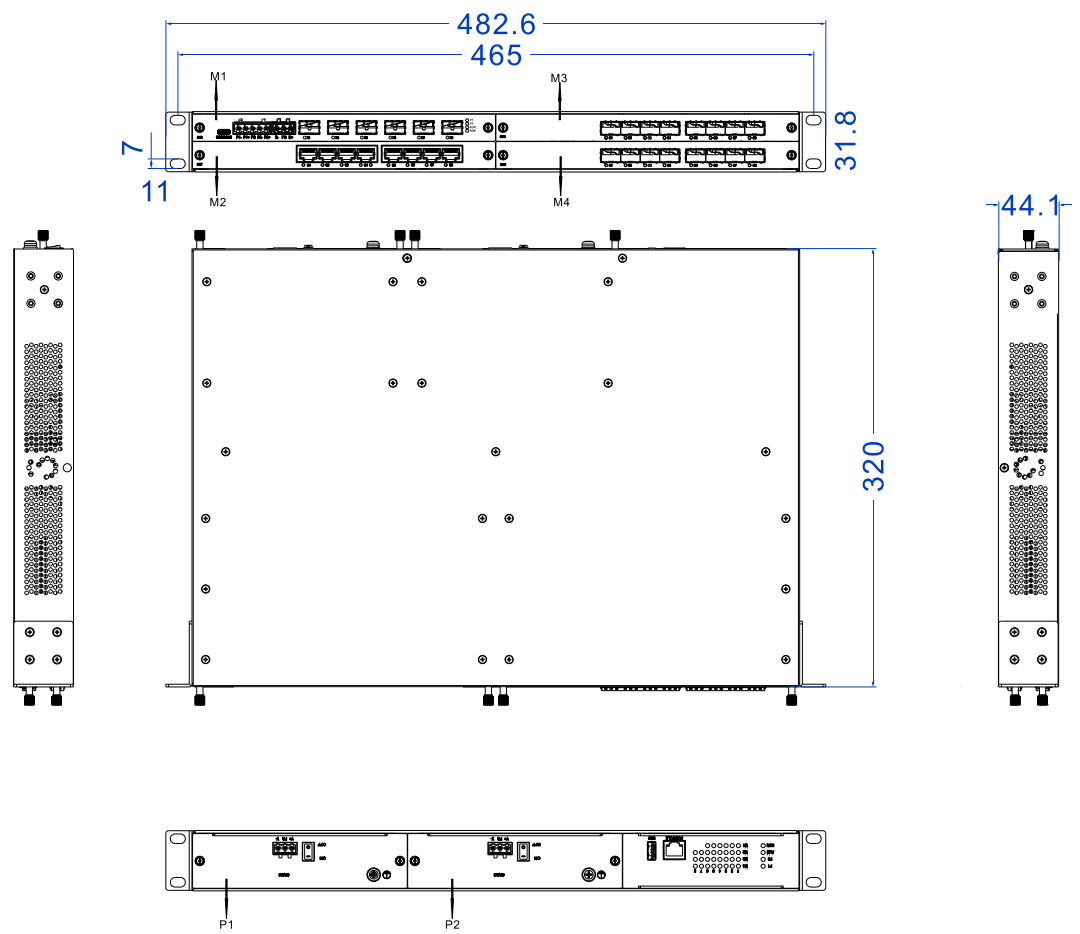


● MES5400-1U-8GS (daughter board)

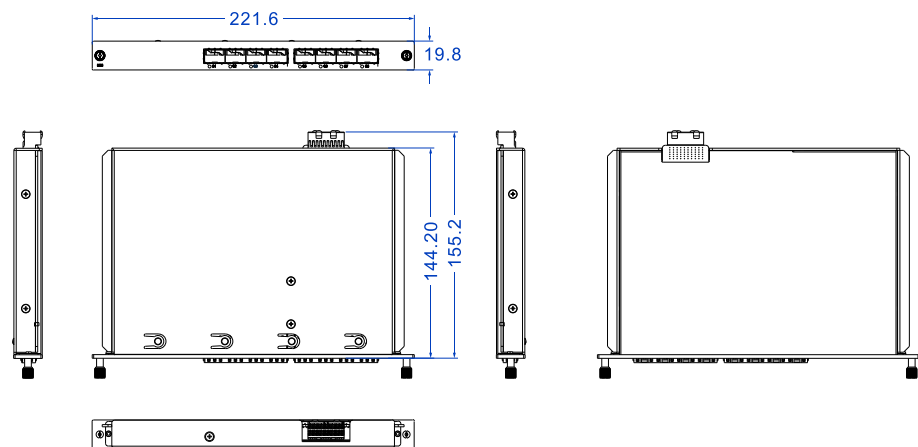


● MES5400-1U-8GT (daughter board)

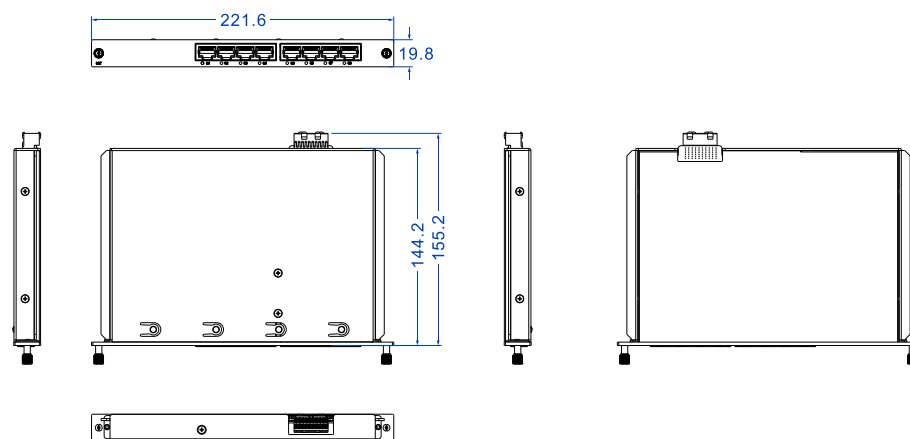

● MES5400-1U-PWR-DC (daughter board)

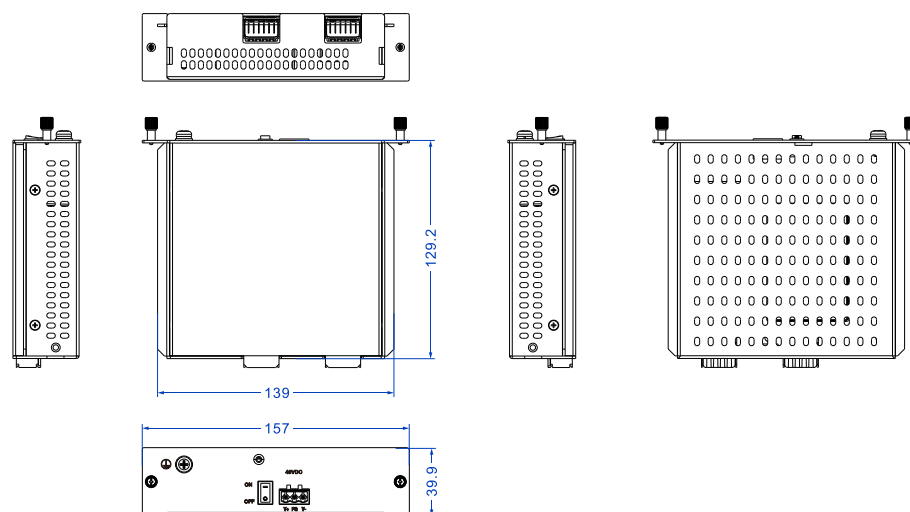

● MES5400-1U-PWR-AC (daughter board)

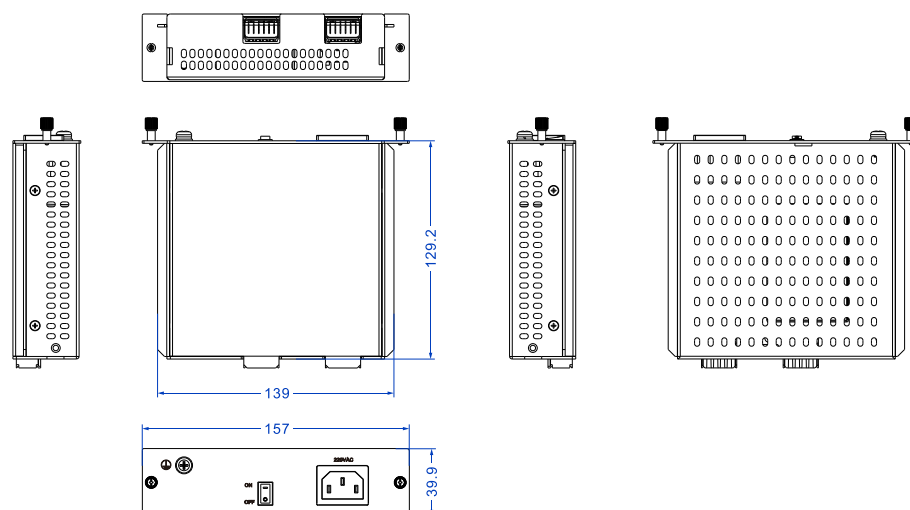

## Specification

Standard & Protocol	IEEE 802.3u for 100Base-TX IEEE 802.3ab for 1000Base-T IEEE 802.3z for 1000Base-X IEEE 802.3x for Flow Control IEEE 802.1D for Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1s for Multiple Spanning Tree Protocol ITU-T G.8032 for ERPS IEEE 802.1Q for VLAN IEEE 802.1AB for LLDP IEEE 802.3ad for LACP IEEE1588v2 for PTP IEEE 802.1 AS for clock synchronization
Management	SNMP v1/v2c/v3 centralized management devices, RMON, port mirroring, LLDP, DHCP Server, DHCP Relay, Modbus TCP monitoring, IEC61850 MMS, port speed limit, port isolation, port statistics, file management, online upgrade, log information, Syslog server
Security	User privilege classification, ACL, SSH/HTTPS protocol authorization, link flapping protection, port loopback detection, access control, SNMP, RMON, IPDT, IPv6DT, Smart-Link, NAT, port alarm, temperature alarm, power alarm, network load alarm
Switch Function	802.1Q VLAN, MAC, static aggregation, LACP, ARP, storm suppression
Unicast / Multicast	IGMP-Snooping, MLD-Snooping, GMRP, IGMP, MLD, PIM-SM, PIM-DM, IPv6-PIM-SM, IPv6-PIM-DM
Redundancy Technology	Ring, MRP, STP/RSTP/MSTP, HSR/PRP, ERPS
Routing Technique	RIP, RIPng, OSPF, OSPFv3, ISIS, VRRP, IPv6 VRRP, BGP
Troubleshooting	Ping, Traceroute, Network Cable Diagnosis, DDMI
Time Management	PTP, NTP Client, Time Zone Configuration

#### Interface

Gigabit copper port: 100/1000Base-T(X) self-adaption or forced mode, RJ45, Automatic Flow Control, Full/Half Duplex Mode self-adaption, MDI/MDI-X Autotuning

Gigabit SFP: 100/1000Base-X SFP slot, 100M/Gigabit self-adaption

CONSOLE: CLI command line management port(RS-232), RJ45 and Type-C

Relay: Support 1 relay alarm output, adopt 3-pin 5.08mm pitch terminal blocks, the current carrying capacity is 2A@250VAC or

2A@30VDC

Indicator	Power indicator, running indicator, alarm indicator, interface indicator
-----------	--

#### Switch Property

Transmission mode: store and forward  
Cache: 24Mbit  
Backplane bandwidth: 110Gbps  
Switch delay: <10μs

#### Power Supply

DC products:

- Power input: 2 x 48VDC power inputs, support hot-swappable
- Connection mode:
  - Front panel: adopt 5-pin 5.08mm pitch terminal blocks
  - Back panel: adopt 2 3-pin 5.08mm pitch terminal blocks with switch

AC products:

- Power input: 2 x 220VAC (110~240VAC) power supply inputs
- Connection mode:
  - Front panel: adopt 5-pin 5.08mm pitch terminal blocks
  - Back panel: adopt 2 three-phase socket with switch

#### Power Consumption

MES5400-1U-8GT16GS6XS-2LV:

- No-load at normal temperature: 12.48W@48VDC
- Full-load at normal temperature: 33.6W@48VDC
- No-load at high temperature: 14.56W@48VDC
- Full-load at high temperature: 35.52W@48VDC

MES5400-1U-24GT6XS-2HV:

- No-load at normal temperature: 12.09W@220VAC
- Full-load at normal temperature: 27.35W@220VAC
- No-load at high temperature: 16.63W@220VAC
- Full-load at high temperature: 31.46W@220VAC

#### Working Environment

Operating temperature: -40~75°C  
Storage temperature: -40~85°C  
Relative humidity: 5%~95% (no condensation)

#### Mechanical Structure

Housing: IP30 protection, metal  
Installation: 19-inch 1U rack mounting  
Dimension (W x H x D): 482.6mm×44.1mm×320mm  
Weight:

- MES5400-1U-8GT16GS6XS-2LV: 6.849kg
- MES5400-1U-24GT6XS-2HV: 7.233kg



Industrial Standard	<p>IEC 61000-4-2 (ESD, electronic static discharge), Level 4</p> <ul style="list-style-type: none"> <li>• Air discharge: <math>\pm 15\text{kV}</math></li> <li>• Contact discharge: <math>\pm 8\text{kV}</math></li> </ul> <p>IEC 61000-4-4 (EFT, electrical fast transient pulses), Level 4</p> <ul style="list-style-type: none"> <li>• Power supply: <math>\pm 4\text{kV}</math></li> <li>• Copper port: <math>\pm 2\text{kV}</math></li> </ul> <p>IEC 61000-4-5 (Surge), Level 4</p> <ul style="list-style-type: none"> <li>• Power supply: differential mode <math>\pm 2\text{kV}</math>, common mode <math>\pm 4\text{kV}</math></li> <li>• Copper port: differential mode <math>\pm 2\text{kV}</math>, common mode <math>\pm 4\text{kV}</math></li> </ul> <p>Shock: IEC 60068-2-27 Free fall: IEC 60068-2-31 Vibration: IEC 60068-2-6</p>
Authentication	CE, FCC, RoHS, IEC 61850-3, IEEE 1613
Warranty	5 years



## Ordering Information

Model	Gigabit RJ45 LAN Port	Gigabit SFP	Power Supply
MES5400-1U-8GT16GS6XS-2LV	8	22	2 x 48VDC
MES5400-1U-8GT16GS6XS-2HV	8	22	2 x 220VAC (110~240VAC)
MES5400-1U-16GT8GS6XS-2LV	16	14	2 x 48VDC
MES5400-1U-16GT8GS6XS-2HV	16	14	2 x 220VAC (110~240VAC)
MES5400-1U-24GT6XS-2LV	24	6	2 x 48VDC
MES5400-1U-24GT6XS-2HV	24	6	2 x 220VAC (110~240VAC)
MES5400-1U-24GS6XS-2LV	—	30	2 x 48VDC
MES5400-1U-24GS6XS-2HV	—	30	2 x 220VAC (110~240VAC)

## Optional Module Accessories

Card Slot	Module	Remark
M2	MES5400-1U-8GS or MES5400-1U-8GT	Optional
M3	MES5400-1U-8GS or MES5400-1U-8GT	Optional
M4	MES5400-1U-8GS or MES5400-1U-8GT	Optional
P1, P2 (DC)	2 x 48VDC	Optional
P1, P2 (AC)	2 x 220VAC (110~240VAC)	Optional
MES5400-1U-8GS	8 Gigabit SFP slots	Optional
MES5400-1U-8GT	8 Gigabit RJ45	Optional



Address: 3/B, Zone 1, Baiwangxin High Technology Industrial Park, Song Bai Road,  
Nanshan District, Shenzhen, 518108, China

TEL.: +86-755-26702668 ext 835 FAX: +86-755-26703485

E-mail: ics@3onedata.com

Website: www.3onedata.com

◀ Please scan our QR code for more details

\*Product pictures and technical data in this datasheet are only for reference. Updates are subject to change without prior notice. The final interpretation right is reserved by 3onedata.