



IES6000-8GP2HS-2P24-120W

DIN-Rail or Wall Mounting

10-Port Gigabit Layer 2 Managed Industrial PoE Ethernet Switch

- Support 2 2.5G SFP slots and 8 Gigabit PoE copper ports
- Adopt Ring patented technology, support single ring, coupling ring, chain, Dual-homing, automatic recovery time of network failure < 20ms
- Support multiple network protocols and industrial standard, such as STP/RSTP/MSTP, ERPS, DHCP, VLAN, QoS function, IGMP Snooping function, LLDP etc.
- Support dual power redundancy, input voltage is 24VDC
- Support -40~75°C wide operating temperature range



Introduction

IES6000-8GP2HS-2P24-120W is 10-port Gigabit layer 2 managed industrial PoE Ethernet switch. PoE power supply conforms to IEEE 802.3af/at protocol standard. This product provides Gigabit PoE copper ports and 2.5G SFP slots, and it adopts DIN-Rail or Wall mounting which can meet the requirements of different scenes.

Network management system supports various network protocols and industrial standards, such as Ring, STP/ RSTP/MSTP, ERPS, DHCP, VLAN, QoS function, IGMP Snooping, LLDP, Port Trunking, Port Mirroring, etc. It also possesses complete management functions, including Port Configuration, Access Control, Network Diagnosis, Online Upgrading and so on, and supports CLI, WEB, Telnet, SSH, SNMP and other access methods. It can provide users with good experience with friendly design of network management system interface, simple and convenient operation.

The product provides two independent power supply circuits, which can ensure the normal operation of the device when one power supply fails. The design of DIP switch could implement device factory setting recovery. When DC power supply or port has link failure, ALM indicator will be bright and send out alarm, meanwhile, alarm device connected to the relay will send out alarm for rapid scene troubleshooting. The hardware adopts fanless, low power consumption and wide temperature design, which has passed rigorous industrial standard tests, and suits for the industrial scene environment with harsh requirements for EMC. It can be widely used in AP coverage, railway transportation, smart city, safe city, new energy, smart grid, intelligent manufacturing and other industrial fields.


Features and Benefits

- ⊙ SNMPv1/v2c/v3 is used for network management of various levels
- ⊙ RMON can be used for efficient and flexible network monitoring
- ⊙ QoS supports real-time traffic classification and priority setting
- ⊙ LLDP can achieve automatic topology discovery, which is convenient for visual management
- ⊙ DHCP server can be used for distributing IP address with different strategies
- ⊙ DHCP Snooping can ensure DHCP client gets IP address from legal DHCP server
- ⊙ DHCP relay function can realize IP address, gateway, DNS configuration cross network segment
- ⊙ File management is convenient for the device rapid configuration and online upgrading
- ⊙ User privilege classification configuration can set user privilege level
- ⊙ SSH configuration and HTTPS configuration can improve device's management security and guarantee data access security
- ⊙ Support NAS network access service and provide security assurance for multiple services
- ⊙ MEP function can determine the scope and boundary of maintenance domain

- Ring and STP/RSTP/MSTP can achieve network redundancy, preventing network storm
- EPRS function can realize link backup and improve the reliability of network
- Loop protection could efficiently eliminate the influence caused by port loopback
- Relay alarm is convenient for troubleshooting of construction site
- Storm suppression can restrain broadcast, unknown multicast and unicast
- VLAN is used for simplifying network planning
- PoE could power device over Ethernet, thus decreasing the cable connection of powered devices
- Support DDM (digital diagnostic monitoring) function, which can monitor the optical power, temperature, voltage and other real-time parameters of SFP fiber module with DDM function, facilitating the link default diagnosis of optical fiber
- Static Aggregation and LACP can increase network bandwidth and enhance the reliability of network connection to achieve the best bandwidth utilization
- IGMP Snooping can be used for filtering multicast traffic to save the network bandwidth
- Network diagnosis and troubleshooting could be conducted via Ping and cable detection and port mirroring

Dimension

Unit: mm

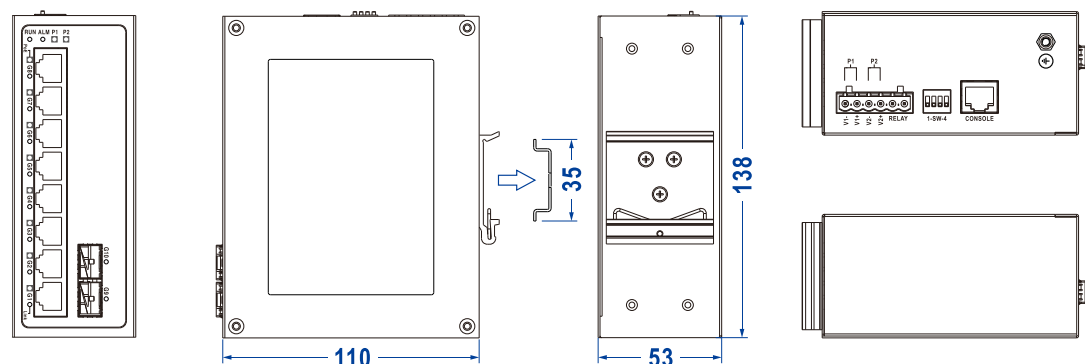

Specification

Standard & Protocol	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3ab for 1000Base-T IEEE 802.3z for 1000Base-X IEEE 802.3x for Flow Control IEEE 802.1D for Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1s for Multiple Spanning Tree Protocol
---------------------	---

	ITU-T G.8032 for ERPS IEEE 802.1Q for VLAN IEEE 802.1p for CoS IEEE 802.1AB for LLDP IEEE 802.3ad for LACP IEEE 802.3af for PoE IEEE 802.3at for PoE+
Management	SNMP v1/v2c/v3 Centralized Management of Equipment, RMON, QoS, LLDP, DHCP Server, DHCP Snooping, DHCP relay, user password, login method, File Management, Log Management, Port Statistics, MEP and PoE
Security	User Privilege Classification, SSH Configuration, HTTPS Configuration, Access Control, SNMP, RMON, NAS, Radius Server Authentication, TACACS + Server Authentication, Port Alarm, DC Power Supply Alarm, Loop Protection
Switch Function	802.1Q VLAN, Static Aggregation, LACP
Unicast / Multicast	IGMP Snooping, Unicast MAC
Redundancy Technology	Ring, STP/RSTP/MSTP, ERPS
Troubleshooting	Ping, Cable Detection, Port Mirroring, DDMI
Time Management	NTP, Time Zone Configuration
Interface	Gigabit PoE copper port: 10/100/1000Base-T(X), RJ45, Automatic Flow Control, Full/Half Duplex Mode, MDI/ MDI-X Autotuning; The single port supports 15.4W PoE output power of IEEE802.3af standard and 30W PoE+ output power of IEEE802.3at standard; PoE power supply pin: V+, V+, V-, V- correspond to pin 1, 2, 3, 6 2.5G SFP Slot: 100/1000 Base-X self-adaption or 100/1000/2.5G Base-X forced mode, SFP slot Console port: CLI command line management port(RS-232), RJ45 Alarm Port: 6-Pin 5.08mm pitch terminal blocks, relay occupies 2 pins and 1 relay alarm information output is supported, the current load capability is 1A@30VDC or 0.3A@125VAC
Indicator	Running Indicator, Alarm Indicator, Power Supply Indicator, Interface Indicator, PoE Indicator

Switch Property	Transmission mode: store and forward MAC address: 8K Packet buffer size: 4Mbit Backplane bandwidth: 30G Switch time delay: <10μs
Power Supply	Power supply input: 24VDC (12~48VDC). Connection method: 6- Pin 5.08mm pitch terminal blocks (power supply occupies 4 pins) Power supply quantity: dual power supply redundancy backup Connection protection: anti-reverse connection Overcurrent protection: 5A
Power Consumption	No-load: 3.86W@24VDC Full-load: 60W@12VDC; 124W@24VDC; 150W@48VDC
Working Environment	Operating temperature: -40~75°C Storage temperature:-40~85°C Relative humidity: 5%~95% (no condensation)
Physical Characteristic	Housing: IP40 protection, metal Installation: DIN-Rail or wall mounting Dimension (W x H x D): 53mm×138mm×110mm
Industrial Standard	IEC 6100042 (ESD, electrostatic discharge), Level 3 IEC 6100044 (EFT, electrical fast transient pulses), Level 3 IEC 61000-4-5 (Surge), Level 3 Shock: IEC 60068- 2- 27 Free fall: IEC 60068- 2- 32 Vibration: IEC 60068-2-6
Authentication	CE, FCC, RoHS
Warranty	5 years

Ordering Information

Available Models	Gigabit PoE copper port	2.5G SFP slot	Power supply
IES6000-8GP2HS-2P24-120W	8	2	24VDC redundant power supply



Address: 3/B, Zone 1, Baiwangxin High Technology Industrial Park, Song Bai Road,
Nanshan District, Shenzhen, 518108, China

TEL.: +86-755-26702668 ext 835 FAX: +86-755-26703485

E-mail: ics@3onedata.com

Website: www.3onedata.com

◀ Please scan our QR code for more details

*Product pictures and technical data in this datasheet are only for reference. Updates are subject to change without prior notice. The final interpretation right is reserved by 3onedata.